




# KR8LD Scarifier

No matter how you kut it, the Kut-Rite KR8LD is a solid low cost solution for any small removal/surface preparation project. Consider the KR8LD for intermittent use. It works well for general surface preparation, removal of thermo-plastic lines, paints and thin mil coatings.

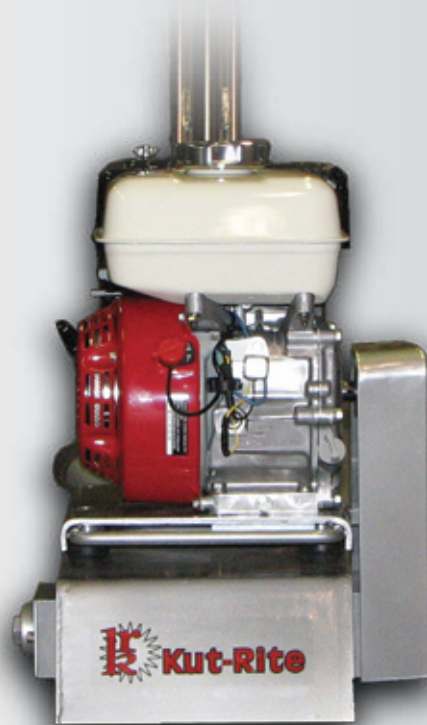

## Features & Benefits

**Extra-heavy construction for added stability and ballast.**

**Zero-depth height adjustment.**

**Drum centrally located under the motor for better balance and less vibration.**

**1-1/2" vacuum port for virtually dust-free operation.**

**Compact design.**

**Front-mounted lifting handles, make loading and unloading easy.**

**Stop button for immediate motor shut off.**



[www.kutritemfg.com](http://www.kutritemfg.com)



# KR8LD Scarifier



## Steel / Solid Carbide

## Result

## Description

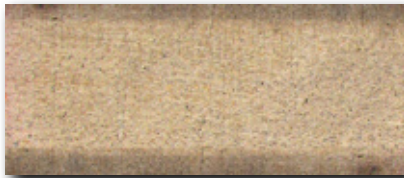

The KR8LD equipped with steel cutters is ideal for preparing concrete for a coating application and/or removal of various surface materials such as: carpet foam backing, adhesives, mastics, glues, rust from steel decks and some thin mil coatings. Use a solid carbide cutter to achieve similar results with over ten times the cutter life.

## Carbide (TCT)

## Result

## Description



Equip the KR8LD with our standard carbide tip cutters for grinding, leveling, grooving, cleaning and general surface preparation. The standard carbide tip cutter is a very aggressive cutter designed for removing material fast.

## Full Face™

## Result

## Description



The Full Face™ carbide tip cutter is ideal for removing pavement markings, epoxy, paint, adhesives, mastics, etc. Use the Full Face™ cutter for removal applications that require a flat even finish. The full face of the carbide tip provides 100% removal of surface material with minimal damage to the substrate.

## Milling

## Result

## Description



Utilize the milling cutter for removing thick and soft materials such as: mastic, thermo-plastic, waterproofing membranes, cold plastic coatings, glues, etc... The milling cutter leaves the surface smooth and ready for preparation.

Models	HP	Power Source	Power Specs	Weight	Production sq ft
KR8G5.5 LD	5.5	Gas	Honda 5.5HP	140lbs	2-400/hr
KR8E2 LD	2	Electric	120/240 1PH 18/9FLA	168lbs	2-400/hr

All weights can vary based on cutter selection



Kut-Rite  
27482 Northline Rd.  
Romulus, MI 48174

[www.kutritemfg.com](http://www.kutritemfg.com)

P:734.955.9311  
P:877.786.5067 - Toll Free  
F:734.955.9314