

TKO-2513 Scarifier/Planer

No matter how you "kut" it, the Kut-Rite TKO-2513 Scarifier/Planer Attachment is the most powerful scarifier/planer in its class. In combination with a skid steer machine, the TKO-2513 delivers up to 25 horse power to the surface. The TKO-2513 Scarifier/Planer Attachment weighs in at over 400 pounds and is equipped with a heavy duty bi-directional hydraulic motor. Consider the TKO-2513 Scarifier/Planer for extremely fast surface preparation, heavy removal of concrete, asphalt, thermoplastic lines, paints, coatings, trowel marks, curled joints, sidewalk trip hazards, etc.

Features & Benefits

Long-life bi-rotational hydraulic motor produces up cut or down cut

Scarifier head never leaves the surface while cutting in forward & reverse speeds; increases production rate by 50%

Quad-spring suspension for constant ground contact in uneven areas

Attachment configured for most popular mini skid steers

Precision depth control remembers your cutting depth until you change it.


Quick attach mounting plate and QD hydraulic lines for 90 second complete tool change

Vacuum hose port

Optional diamond pack available.

www.kutritemfg.com

TKO-2513 Scarifier/Planer

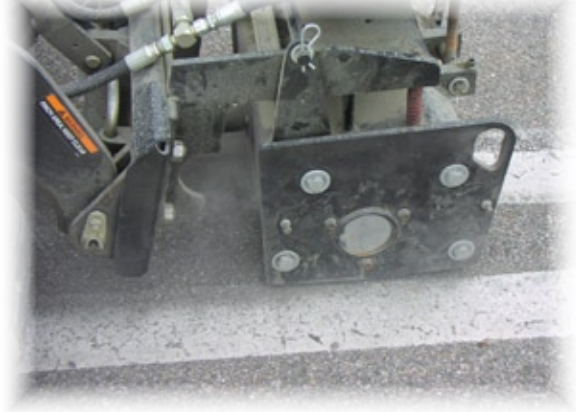

Carbide (TCT)

Result

Description



Equip the TKO-2513 with our standard carbide tip cutters for extreme grinding, leveling, grooving, cleaning and general surface preparation. The standard carbide tip cutter is a very aggressive cutter designed for removing material such as: pavement markings, epoxy coatings and waterproofing membranes.

Full Face™

Result

Description



The KR12PT Full Face™ carbide tip cutter is ideal for removing pavement markings, epoxy, paint, carpet glue, mastic, coal tar, etc... Use the KR12PT when a smooth surface is required. The KR12PT provides 100% removal of surface material with minimal damage to the substrate.

KR16PT Full Face™

Result

Description



The KR16PT Full Face™ carbide tip cutter is a revolutionary tool designed for removing pavement markings, epoxy, paint, adhesives, mastics, etc... Use the KR16PT to mill a surface prior to polishing. The KR16PT cuts a surface equal to diamonds. It cuts faster and last longer.

Milling

Result

Description



Utilize the milling cutter for removing thick and soft materials such as: mastic, thermo-plastic, waterproofing membranes, cold plastic coatings, glues, etc... It leaves the surface smooth and ready for preparation. Often used to remove bulk of material prior to a carbide tip cutter.

Models	HP	Power Source	Power Specs	Weight	Production sq ft
TKO-2513	25	Hydraulic	13-15GPM at 2500-3000psi	450lbs	800-1000hr

All weights can vary based on cutter selection



Kut-Rite
27482 Northline Rd.
Romulus, MI 48174

www.kutritemfg.com

P:734.955.9311
P:877.786.5067 - Toll Free
F:734.955.9314